


# J1004-SMA

Precision is  
our business

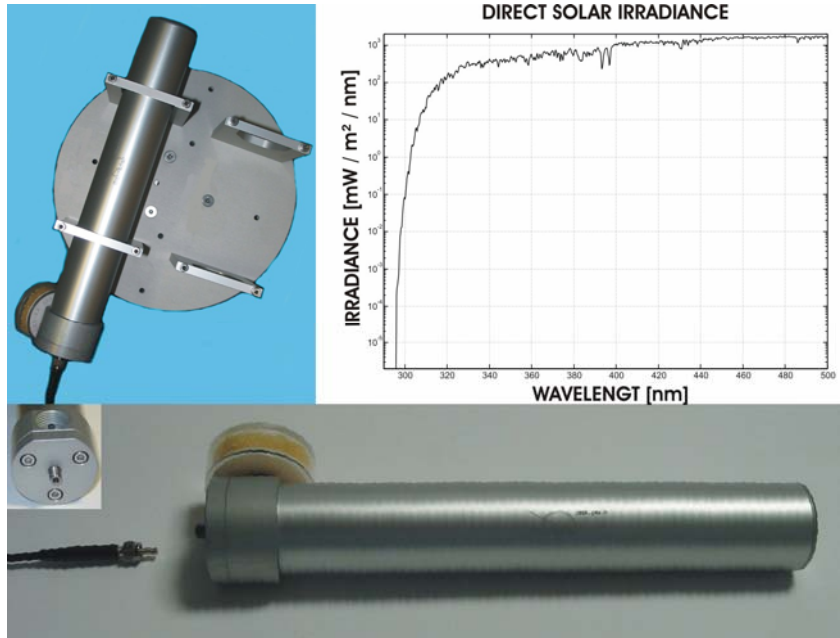

## APPLICATION

The direct entrance optic is a special designed telescope which allows the study of the direct irradiance of the solar radiation. The optic has a weatherproof housing and is designed for use with a SMA type quartz fibre. An already internally fitted light guide allows on an easy way to connect an external Light guide with a standard SMA connector. The optic has a field of view of about 1.5°.

The outer dimension of the optic allows the fitting to common used solar trackers.

The J1020-DRYING-K15 is the standard drying agent.

## SPECIFICATION

Wavelength range	UV to NIR
Drying agent	yes
Aperture	1.5°

## Physical data

Weight	0,45 kg
Size	38/44 mm(diameter) x 250 mm (length)
Material	anodised aluminium
Window	UV grade fused silica

CMS – Ing. Dr. Josef Schreder  
Eggerstrasse 8  
6322 Kirchbichl  
AUSTRIA

Tel: 0043 / (0)5332 / 77056  
Fax: 0043 / (0)5332 / 76692  
E-Mail: info@schreder-cms.com